


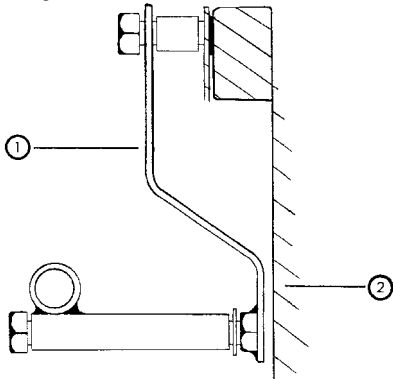


BIKE-PACK SYSTEM™

Thank you for purchasing our VENTURA BIKE-PACK SYSTEM.
Before use please read all instructions and our Limited Warranty carefully.

<p>To Fit: Suzuki GSXR 750 WR</p> <p>S065/B L-Brackets PF17/B Pack-Rack for use with 'Aerodynamic' system packs. SR17/B Sport-Rack GH 15/17/B Grab Handle</p> <p>A range of various style packs, for the 'Aerodynamic' system, along with storm covers and optional shoulder straps (where applicable) are available.</p> <p>Check with your local dealer, distributor or contact us direct for the latest models.</p> <p>FITTING KIT CONTENTS</p> <p>LD001/B locking device (fitted to L-Brackets)</p> <p>1 LK001/S Key 1 M8 x 25 bolts (black zp) 1 M8 x 3 x 22 heavy flat washer (bright zp) 2 15mm tube spacers (black zp) 2 M8 x 35 bolts (black or bright zp) 2 Part #149 brackets (black zp) 2 M8 x 80 bolts (black zp) 2 M8 x 17 x 1.4 flat washers (black zp)</p> <p>FITTING INSTRUCTIONS</p> <p>1 Remove seats, side covers/rear body (disconnect tail light wiring plug).</p> <p>2 Remove lift rail to rear frame bolts and discard.</p> <p>3 Remove muffler mounting to footpeg casting bolt on the right hand side.</p> <p>4 On the left side, remove the centre bolt from the footrest casting to the frame and discard.</p> 	<p>Legend to Diagram 1</p> <p>1 #149 bracket 2 Mudguard</p> <p>5 The part #149 brackets mount outside from the rear lift rail to frame mounting point, with the nut end downwards, next to the mudguard. Use a 15mm tube spacer between the top of the part #149 bracket and the mounting, secure with the M8 x 35 bolts supplied. Leave loose.</p> <p>6 The L-Bracket right front mounting bolts to the outside of the exhaust mount, using the original bolt. Leave loose.</p> <p>7 The L-Bracket left front mounting bolts outside the centre footrest casting. Fit the M8 x 3 x 22 heavy flat washer between the mount and the casting and secure with the M8 x 25 bolt supplied. Leave loose.</p> <p>8 Place an M8 x 17 x 1.4 flat washer between the L-Bracket tubular rear mounting and the hanging part #149 bracket. Secure with the M8 x 80 bolts supplied. Leave loose.</p> <p>9 Fit Pack-Rack or Sport-Rack into the L-Brackets and tighten all mounting bolts. Remove the Pack-Rack or Sport-Rack from the L-Brackets.</p> <p>10 Refit the rear body (connect the tail light wiring plug) and the seats.</p> <p>11 Fit Pack-Rack or Sport-Rack into the L-Brackets. Tighten the L-Bracket locking devices by following the procedure in the General Instructions For Use.</p> <hr/> <p>GENERAL INSTRUCTIONS FOR USE</p> <p> The following instructions should be strictly adhered to. Failure to do so may result in an accident causing injury or death.</p>
---	--

Locking Device Tightening Instruction

For racks with formed indents on swaged ends.

- 1 Ensure the knurled locking nut is wound fully back and is in contact with the head of the locking device.
- 2 Tighten the locking device firmly and securely by hand making sure that it is centrally located in the indented groove on the swaged legs of the rack.
- 3 Turning the knurled locknut clockwise, tighten firmly by hand. Using the key tighten an extra 2mm ($\frac{1}{8}$ " approx) of circumference travel.

For racks without indents

- 1 Ensure the knurled locking nut is wound fully back and is in contact with the head of the locking device.
- 2 Tighten the locking device by hand until it comes into positive and firm contact with the rack.
- 3 Using the key, tighten a further 1.125 ($1\frac{1}{8}$) turns.
- 4 Turning the knurled locknut clockwise, tighten firmly by hand. Using the key tighten an extra 2mm ($\frac{1}{8}$ " approx) of circumference travel.

BEFORE USE

All fasteners and components must be checked for tightness and security before each ride.

RIDING SOLO

When riding solo always have the pack facing forward with the load over the pillion seat.

RIDING WITH A PILLION PASSENGER

When riding with a pillion passenger the pack must be fitted facing rearwards.

RECOMMENDATION

Any surfaces that could possibly come in contact with the pack(s) should be covered with protective material such as abrasion resistant film, to prevent marking or damage to the surface finish.

SECURING PACK TO PACK-RACK

To secure the pack use the straps with the quick release clips and attach around the horizontal rung on the Pack-Rack carrier. On some models the quick release system is not available. In this situation loop the shoulder straps around the rung and fasten to the buckle.

WARNING -

The VENTURA Bike-Pack System was not designed as a back rest and should not be used as one by the pillion passenger.

PACKING THE PACK

Always place heavy items at the bottom of the pack and load evenly. Do not position sharp objects against the fabric of the pack.

MAXIMUM CARRYING CAPACITY

Unless specified to the contrary in the fitting instructions or the motorcycle manufacturers recommendations/specifications the recommended maximum load capacity of this system is 9kg (20lbs). It is important that the pack is always securely fastened to the Pack-Rack.

MAXIMUM SPEED

The maximum recommended speed that this system can be used is 130 kph (80mph) or the legal speed limit, whichever is the lower. This limit may be reduced by other accessories, worn tyres, improper handling, overall motorcycle condition or weather conditions.

REMEMBER

Exceeding the weight capacity or the recommended maximum speed may drastically affect the motorcycles handling, stability and performance.

L-BRACKETS

The L-Brackets must always have the Pack-Rack, Sport-Rack or Grab-Handle fitted.

IMPORTANT

The VENTURA BIKE-PACK SYSTEM is designed as a complete unit. The use of non VENTURA parts, bags or other attachments will render the warranty void.

The following VENTURA accessory is available for this model motorcycle:

VENTURA Light-Guard: VP070

"Happy and Safe Motorcycling"

LIMITED WARRANTY

NOTE: Some jurisdictions do not allow limitations on how long an implied warranty, if any, lasts, and do not allow the exclusion of limitation of incidental or consequential damages so the limitations and exclusions below may not apply to you. This warranty gives specific legal rights, you may have other rights which vary from jurisdiction to jurisdiction.

Dold Industries Limited ("Dold") warrants this product to be free from defects in materials and workmanship under normal use and maintenance for a period of one year from its date of original purchase. Dold shall, at its option, either repair or replace a defective product returned to it or its authorised agents, freight prepaid.

This warranty does not apply to any product which has been altered, damaged or rendered non-functional through improper installation or maintenance, abnormal wear and tear due to exposure to the elements, negligence, abuse, accidents or any like circumstance.

Dold shall not be liable for any incidental nor consequential loss or damage resulting directly or indirectly from any defective product, its sole obligation being to repair or replace such defective product.

This warranty is in lieu of, and excludes, all other warranties, expressed or implied, including the warranties of merchantability and of fitness for a particular purpose.

To make a warranty claim return the product to the dealer who supplied it with evidence of date of purchase. If you are not satisfied with their response, please contact the distributors for your country or: Dold Industries Ltd, 17 Perclo Place, P O Box 10-393, Te Rapa, Hamilton, New Zealand. Telephone +64 (7) 849-4392. Facsimile +64 (7) 849-4114. E-mail: dold@ventura-bike.com Internet: www.ventura-bike.com

E & O E